

525, 645

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number  
**WO 2004/025978 A1**

(51) International Patent Classification<sup>7</sup>: H04Q 7/30, 7/36

(21) International Application Number:  
PCT/SE2003/001431

(22) International Filing Date:  
15 September 2003 (15.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/410,265 13 September 2002 (13.09.2002) US

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): NASCIMBENE,

Andrea [IT/IT]; Via S. Sofia, 2, I-27020 Torres D'Isola (IT). BOLLE, Aldo [IT/SE]; Pärt-Antons gata 72 A, S-426 79 Västra Frölunda (SE).


(74) Agent: ALBIHNS STOCKHOLM AB; P.O. Box 5581, Linnégatan 2, S-114 85 Stockholm (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: OPTIMISATION MECHANISM FOR FREQUENCY REUSE

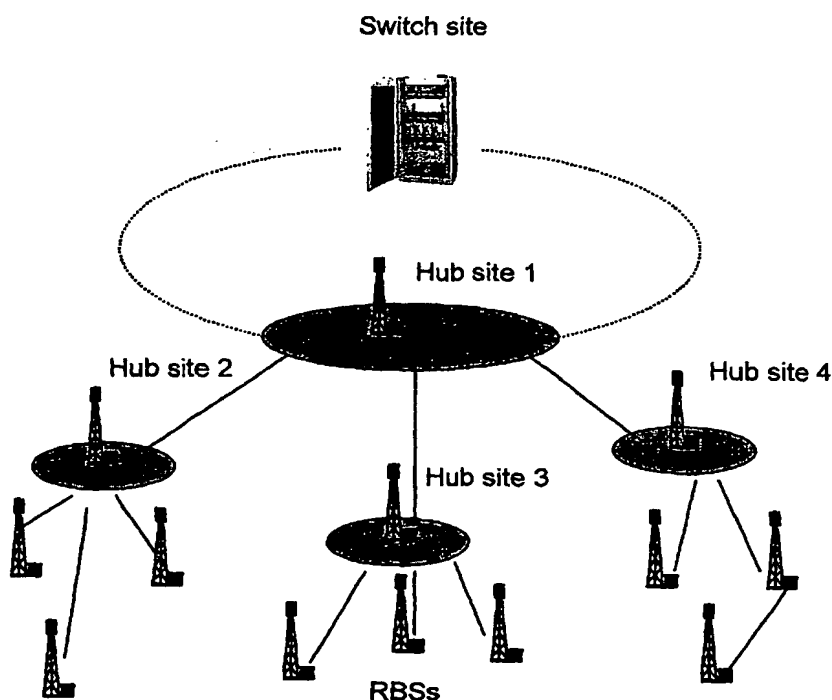

(57) Abstract: The present invention describes a network planning mechanism for the optimisation of system quality associated with frequency reuse for a mobile network infrastructure and business access applications, by using an intelligent combination of microwave point-to-point and point-to-multipoint links in Broadband Wireless Systems or LMDS, for example. In an embodiment of the invention, Radio Base Stations (RBSs) sites can be connected to the Switch site by a combination of fibre optics, leased lines, or preferably microwave radio links. The embodiment enables traffic from several end sites to be concentrated at selected hub sites (hub site 1-4). The system is optimised by minimizing the quality degradation that can be experienced due to excessive interference inside a certain portion of the point-to-multipoint covered sector by means of the combined point-to-multipoint and point-to-

point solutions. The RBS, which on the planning phase will experience excessive interference in the direction to the hub, is not directly connected the point-to-multipoint hub, but through a point-to-point link connecting to an access terminal, co-located with a different RBS or business user, in line of sight with the previous one. The access terminal in turn connects the point-to-multipoint hub allowing a frequency reuse factor of one to be deployed.

BEST AVAILABLE COPY

W 2004/025978 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## Optimisation Mechanism for Frequency Reuse

### Field of the Invention

- 5 The present invention pertains generally to mobile telecommunication networks and, more specifically, to the optimisation of the system quality associated with frequency reuse.

### Background of the Invention

10

- In a basic mobile telecommunication network, a mobile switching center (MSC) is linked to a plurality of base transceiver stations by digital transmission links. In GSM, for example, the digital transmission links connect the radio base stations (RBS) to a base station controller (BSC), which controls and manages
- 15 the base stations and converges the traffic to the MSC. The transmission of voice and data traffic between the base stations and the core network is a vital task and is often referred to as backhaul. Typically, mobile operators employ either leased lines (T1/E1), privately owned wire lines (including fibre optic lines), or microwave links for backhaul operations. However, using leased T1 or E1 lines
- 20 generally involves leasing them from a fixed telephone provider that requires paying what can be expensive monthly charges to someone who can be a direct competitor. Alternatively, operators can use their own wire lines, but this is often unattractive due to the high cost of installation from digging and laying the lines of building the infrastructure. Another disadvantage is that the relatively slow
- 25 deployment of installing lines and the inflexibility for expansion becomes an important limitation in industries experiencing fast growth such as mobile communications.

A more attractive option is to provide backhaul using microwave radio e.g. point-to-point links whereby a base station is connected to the BSC via line-of-sight mounted microwave antennas that are in direct communication with each other. Another variation used is that of the point-to-multipoint link that connects various base stations to a single BSC location, for example. The growth of mobile networks and 3G networks carrying increasing amounts of packet/cell traffic will lead to an increase in demand for more capacity and flexibility in the backhaul part of these networks. Microwave links are capable of carrying relatively large amounts of data, comparable to E1/T1 trunks, enable operators to offer a plethora of new high bit-rate services. The cost effectiveness of microwave links also allows mobile operators to combine cellular backhaul with business access within the same sector to enable a wide range of professional services, allowing quick access to market and fast growth of business.

The expansion in services including voice and video as well as new packet switched applications, provide new opportunities for operators to attract new customers. However, a primary concern to operators is to provide customers with high network quality and reliable quality of service (QoS) to customer terminals. Factors that lower network quality include spectrum efficiency and excessive interference, which can be attributed to inefficient traffic resource allocation and high frequency reuse factor in cells.

In view of the foregoing, it is desirable to provide an improved network planning mechanism for optimising system quality and frequency reuse in mobile network infrastructures for ensuring reliability and quality of service in high bit-rate services such as business access applications.

#### Summary of the Invention

Briefly described and in accordance with embodiments and related features thereof, there is provided a method and system for a network planning mechanism for the optimisation of system quality associated with frequency reuse for a mobile network infrastructure and business access applications, by using an intelligent combination of microwave point-to-point and point-to-multipoint links in Broadband Wireless Access Systems or LMDS, for example. In an embodiment of the invention, Radio Base Stations (RBSs) sites can be connected to the Switch site by a combination of fibre optic lines, leased lines, or preferably microwave links. The embodiment enables traffic from several end sites to be concentrated at selected hub sites. By way of example, the network planning of the point-to-point and point-to-multipoint links can be chosen to enable a first RBS site to be connected to a second RBS site by means of a point-to-point terminal such that the access terminal, co-located with the second RBS site, routes the traffic from both the first RBS site and the second RBS site to the Hub site. This enables the traffic of the first RBS site to be much less affected by co-channel interference from a remote point-to-multipoint Hub site.

In a system aspect of the invention, the system is optimised by minimizing the quality degradation that can be experienced due to excessive interference inside a certain portion of the point-to-multipoint covered sector by means of a combined point-to-multipoint and point-to point link solution. The RBS in the planning phase that experiences excessive interference in the direction to the hub, is not directly connected the point-to-multipoint hub, but through a point-to-point link connecting to an access terminal, co-located with a different RBS (or business user), in line of sight with the previous one. The access terminal in turn connects the point-to-multipoint hub allowing a frequency reuse factor of one to be deployed. The point-to-point link uses a portion of the point-to-multipoint frequency block consisting of a single wideband channel, without using a

dedicated frequency, thus allowing the safe use of a frequency reuse factor of one that results in significantly reduced interference.

## 5 Brief Description of the Drawings

The invention, together with further objectives and advantages thereof, may best be understood by reference to the following description taken in conjunction with the accompanying drawings in which:

10

Figure 1 is a depiction of an exemplary access network;

Figure 2 shows the cell patterns resulting from using a frequency reuse factor of one and two respectively;

Figure 3 shows the overall CIR patterns for reuse factors of one and two  
15 respectively;

Figure 4 shows the CIR patterns for the worst sector;

Figure 5 shows the combined use of point-to-multipoint and point-to-point links that allows for the safe use of a frequency reuse factor of one; and

Figure 6 shows the point-to-point link contained within the point-to-  
20 multipoint frequency spectrum.

## Detailed Description of the Invention

### 1. Scope

25

In an embodiment of the present invention there is provided a mechanism for the optimisation of the frequency reuse, for mobile network infrastructure and business access applications, by means of combined use of microwave point-to-point links and point-to-multipoint, Broadband Wireless Access Systems or

30 Local Multipoint Distribution Systems (LMDS), for example. Deployment of

LMDS is particularly attractive since LMDS networks can be rolled out very quickly, offering customers service in a matter of days and weeks, compared with the relatively long time to deploy fibre networks, for example.

5 Figure 1 shows an example of the access network for a mobile network application. The end Radio Base Stations (RBSs) can be connected to the Switch site by a combination of fibre optics, leased lines or microwave links. This last technology has been the preferred one both for economical and speed of deployment reasons. Furthermore, figure 1 shows how traffic from several end  
10 sites can be concentrated at selected hub sites (hub site 1-4). In the figure, a site where traffic is concentrated is called a hub site. The Business Access application can still be described by the figure 1 by simply replacing the RBSs with business users. The present invention illustrates how an intelligent combination of the microwave point-to-point and point-to-multipoint technologies can strongly  
15 improve the spectrum efficiency in comparison with exclusive use of point-to-multipoint or point-to-point deployment.

## 2. Use of point-to-multipoint systems in the mobile infrastructure and business access

20

The main benefits in using point-to-multipoint systems in mobile infrastructure and business access applications are roll out flexibility, traffic aggregation with optimum traffic resource allocation, and port aggregation, as described in the forgoing sections.

25

A point-to-multipoint systems based on Asynchronous Transfer Mode (ATM) and on a TDMA access scheme with Fast Dynamic Capacity Allocation (FDCA), gives several advantages compared to point-to-point links or leased lines. ATM as a packet transport technology, optimised for telecom needs, provides

guaranteed Quality of Service (QoS) and the ability to carry any real-time and non real-time traffic. The net benefit of using ATM to accommodate fluctuating capacity demands is that the network can be 'oversubscribed' in terms of number of registered users while still offering QoS, leading to cost savings for the operator. Furthermore, ATM provides differentiated priorities, quality parameters and tariffs among different services and users and can support both IP and legacy services.

Fast Dynamic Capacity Allocation (F-DCA) is the key to allocating the capacity in a point-to-multipoint system on an ATM cell basis. The benefit of F-DCA is the ability to share capacity over the sector with full flexibility. An example of an LDMS solution is Ericsson's MINI-LINK BAST<sup>TM</sup> which is a broadband wireless access system using point-to-multipoint microwave with the capability of dedicated or dynamically allocating capacity between base stations for high bandwidth services such as high-speed Internet, VPN, LAN-LAN interconnection and videoconferencing.

The roll out flexibility when deploying a point-to multipoint system comes from the area coverage inherently provided by the system. Traffic aggregation benefits come in terms of granularity gain and in terms of potential traffic overbooking. Finally, the built-in ATM concentrator in a point-to-multipoint system allows for cost efficient port aggregation at a hub site or at the switch site.

Point-to-multipoint microwave transmission requires a minimum density of base stations or business users to be economically competitive. As a simple rule of thumb, point-to-multipoint systems become an interesting option when four to five radio base stations or business users can be connected to the central point-to-multipoint hub. While point-to-multipoint has clear advantages over point-to-point in dense areas, the two technologies will continue to be used in



combination. Point-to-point microwave is typically deployed in less base station-dense areas and in combination with point-to-multipoint when distance or interference requires it.

5 The following definitions and terms used herein apply:

- point-to-multipoint - microwave system topology scheme consisting of a single hubbing equipment connecting several access terminals through a particular media and by using a particular multiple access scheme.
- 10 • point-to-multipoint hub - equipment interfacing one or more Access Terminals through a radio connection. It normally consists of (but may be not limited to) at least one radio unit with antenna and modem. It is located at a hub site.
- AT - Access Terminal - terminal device used to connect remote sites to the hub site via a radio connection towards a point-to-multipoint hub.
- 15 • point-to-point - microwave system topology scheme consisting of a single link connecting two points.
- point-to-point terminal - terminal device required at the two ends of a point-to-point link.

20 3. Problem description

Point-to-multipoint systems are deployed in cellular structure and the frequency reuse is fundamental for successful deployment. Note that all terminals in one sector, i.e. all access terminals connected to the same point-to-multipoint hub,  
25 use the same frequency, as typical for broadband point-to-multipoint system with a TDMA access scheme.

Referring now to Figure 2, the reuse factor can be defined as the ratio between the number of channels available to the operator and the number of channels

usable in the same sector. The lower reuse factor, the better spectrum efficiency is achieved. In the following a deployment with reuse factor of 1 and 2 are compared. By way of example, suppose we need to cover a particular area by a 3x3 Hub sites with a point-to-multipoint system. The cell patterns with reuse of 2 and 1 are shown in figure 2 (the stars indicate the hub locations). The "reuse 2" pattern shown uses two frequencies (A/B) and two polarizations (a/b) while the "reuse 1" pattern shown uses one frequency and two polarizations (a/A).

Referring now to Figure 3, the cell patterns, assuming free line of sight over the whole area, generate the CIR (Carrier to Interference Ratio) patterns shown in Figure 3, over the whole area, and in Figure 4, over the worst sector. In order to limit receiver degradation and achieve error free operation of the system, the CIR (or C/I) has to exceed a value, which depends on the used modulation scheme.

It can be concluded that the point-to-multipoint cellular deployment is such that certain portion of the area inside the covered sector, mainly along the side and the diagonal of the square sector, can experience excessive interference due to a co-channel/co-polarized remote hub. This portion is higher when the reuse factor is lower.

The point-to-multipoint cellular deployment is such that a few locations inside the covered sector can experience excessive interference due to a co-channel/co-polarised remote hub. This can be avoided by means of a higher frequency reuse (e.g. 2 or more). Hence the choice is between spectrum efficiency and network quality.

The embodiment of the invention contemplates a network planning mechanism that simultaneously allows the best spectrum efficiency and the best quality. To

achieve best spectrum efficiency, the point to multipoint system is planned for a frequency reuse of one. To avoid network quality degradation point-to-point links are used in the planning phase, either a point-to-multipoint or a point-to-point terminal is chosen as a function of the C/I value in each location, for example.

Figure 5 illustrates an RBS-1, if connected to the local hub through an Access Terminal (AT), would be affected by the co-channel interference from a remote point-to-multipoint hub. When RBS-1 is instead connected to RBS-2 by means of a point-to-point terminal, the antenna angular discrimination will improve the C/I value and guarantee the network quality. Finally the AT, co-located with the RBS-2, will route to the hub both the RBS-1 and -2 traffic. It should be noted that the point-to-point link can reuse part of the point-to-multipoint spectrum (e.g. 7MHz inside the 28MHz point-to-multipoint frequency block allocation), allowing for a very spectrum efficient solution, as shown in Figure 6. Also note that the Figure 5 exemplifies the mobile infrastructure application but the RBSs can be replaced by business users with no modifications of the concept as described.

The invention contemplates the combined use of the point-to-multipoint and point-to-point solutions of the embodiment enables the use of a single frequency block, equal to the point-to-multipoint system channel size, to be sufficient for the complete access network deployment (excluding possible links among hubs) and provides a large improvement in terms of spectrum efficiency. The system quality is optimized in each covered sector of a multi-site cellular deployment by means of the combined use of point-to-multipoint and point-to-point links with minimum spectrum usage such that the total required frequency block equals the channel size of the point-to-multipoint, Broadband Wireless Access Systems or

LMDS. Furthermore, the spectrum usage is minimized by means of the angular antenna discrimination in conjunction with the traffic route diversity.

5 The improvement lies in the fact that the RBS or business user, which on the planning phase would experience excessive interference in the direction to the hub, is not directly connected the point-to-multipoint hub but through a point-to-point link connecting to an access terminal (AT), co-located with a different RBS or business user, in the line of sight with the previous one. The AT in turn connects the point-to-multipoint hub. The point-to point link does not use any  
10 dedicated frequency but a portion of the point-to-multipoint frequency block consisting of a single wideband channel (reuse of 1). The interference is cut and the network quality is preserved due exclusively to the angular protection of the highly directional antenna of the point-to-point terminal, with very little spectrum waste.

15 Although the invention has been described in some respects with reference to specified embodiments thereof, variations and modifications will become apparent to those skilled in the art. It is therefore the intention that the following claims not be given a restrictive interpretation but should be viewed to  
20 encompass variations and modifications that are derived from the inventive subject matter disclosed.

Claims

1. A method of network planning for a mobile network infrastructure comprising a switch site connected to a plurality of Hub sites that are connected to a plurality of radio base stations (RBSs) sites, wherein the mobile network is arranged to provide wireless data and voice services to access terminals in a way that the overall system quality is improved by improving the frequency reuse for said mobile network infrastructure **characterized by**, connecting the Hub sites to the RBS using combination of point-to-point links and point-to-multipoint links.
2. A method according to claim 1 wherein the point-to-multipoint link is a microwave link and is deployed with a frequency reuse of one requiring use of only a single wideband channel.
3. A method according to claim 1 wherein the point-to-point link is a microwave link and uses a portion of the point-to-multipoint frequency block consisting of a single wideband channel, without using a dedicated frequency, thus having a reuse of one.
4. A method according to claims 2 or 3 wherein the interference within a portion of the point-to-multipoint covered sector is reduced by choosing either a point-to-multipoint or a point-to-point terminal as a function of the C/I value in each location, thereby improving spectrum efficiency an the system quality.
5. A method according to any of the preceding claims wherein the network planning includes a first RBS site is connected to a second RBS site by means of a point-to-point terminal such that the access terminal, co-located with the second RBS site, routes the traffic from both the first RBS site and the second RBS site

to the Hub site such that the first RBS site is less affected by co-channel interference.

5 6. A method according to claim 5 wherein the spectrum usage is minimized by means of the angular antenna discrimination in conjunction with the traffic route diversity.

10 7. A method according to claim 1 wherein the RBSs are replaced by business users receiving and running high bit-rate Business Access applications.

8. A mobile network comprising a switch site connected to a plurality of Hub sites that are connected to a plurality of radio base stations (RBSs) sites, wherein the mobile network is arranged to provide wireless data and voice services to access terminals such that service quality is improved and interference reduced  
15 **characterized in that**, the Hub sites are connected to the RBS sites using combination of point-to-point links and point-to-multipoint links.

20 9. A mobile network according to claim 8 wherein the point-to-point links and point-to-multipoint links are any one of radio microwave links, fibre optic lines, or copper lines.

10. A mobile network according to claim 8 wherein the point-to-point link to the terminals are achieved by use of radio antennas having high angular discrimination for reducing the interference.

25 11. A mobile network according to claim 8 wherein a first RBS site is connected to a second RBS site by means of a point-to-point terminal such that the access terminal, co-located with the second RBS site, routes the traffic from

both the first RBS site and the second RBS site to the Hub site such that the first RBS site is less affected by co-channel interference.

5 12. A mobile network according to claims 8-11 wherein the point-to-point link is a microwave link and uses a portion of the point-to-multipoint frequency block consisting of a single wideband channel, without using a dedicated frequency, thus having a reuse of one.

10 13. A mobile network according to claim 8 wherein the RBSs can be replaced by business users receiving and running high bit-rate Business Access applications.


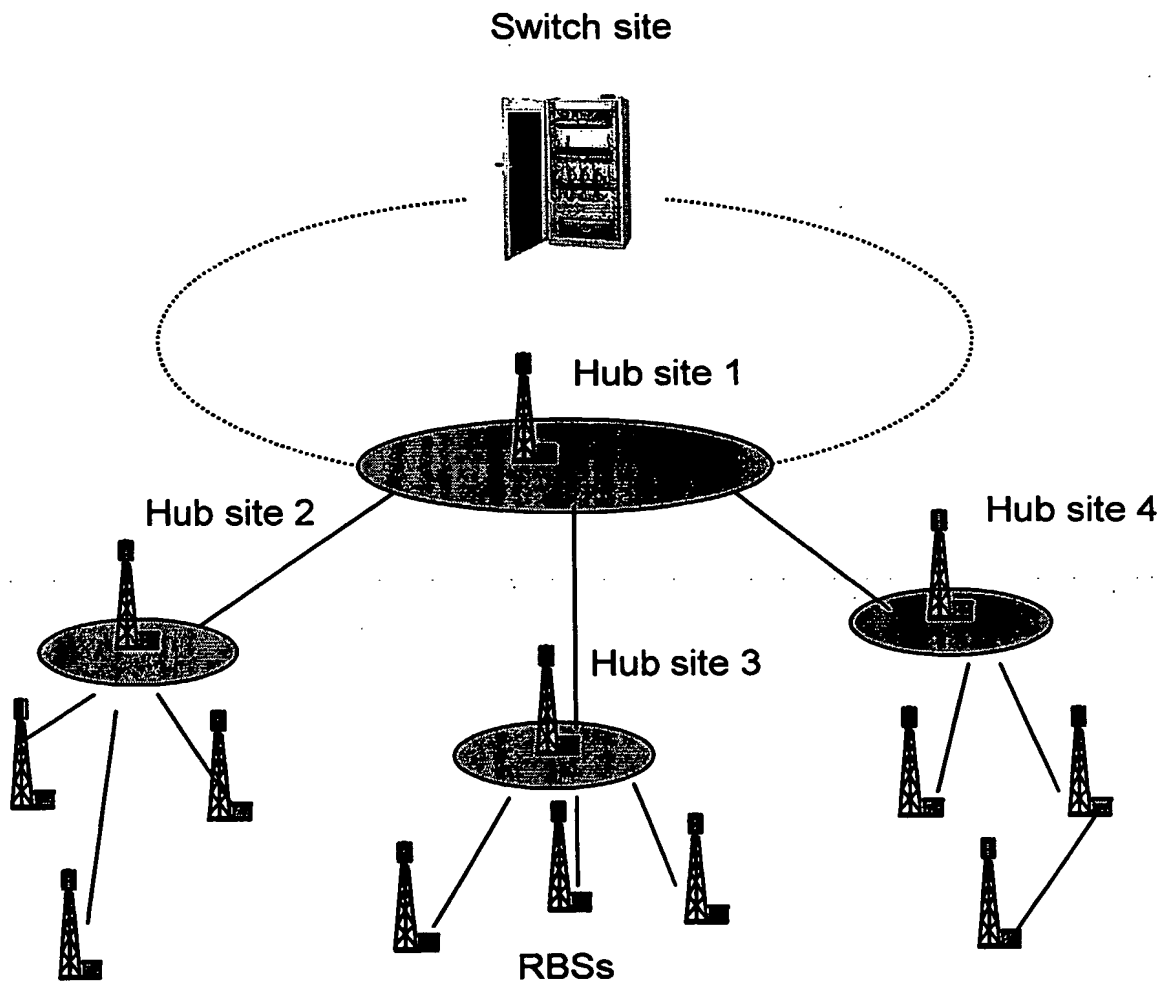


Figure 1




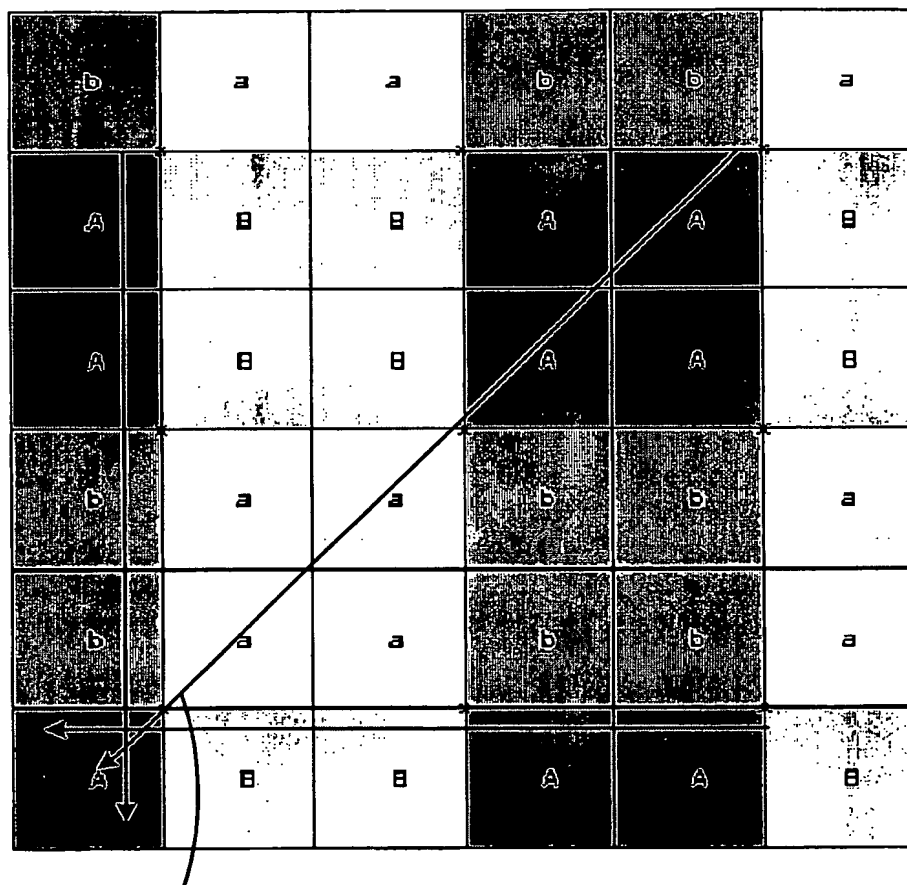

5 sectors  
distance

Reuse 2

Figure 2

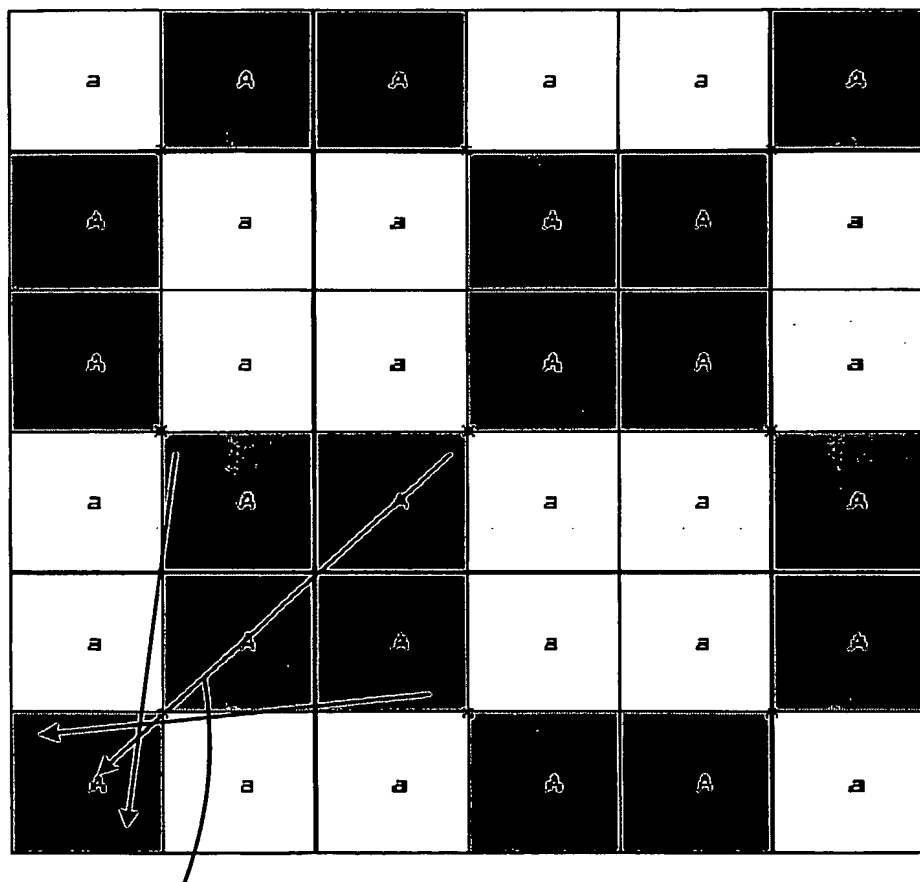

3 sectors  
distance

Reuse 1

Figure 2

4/8




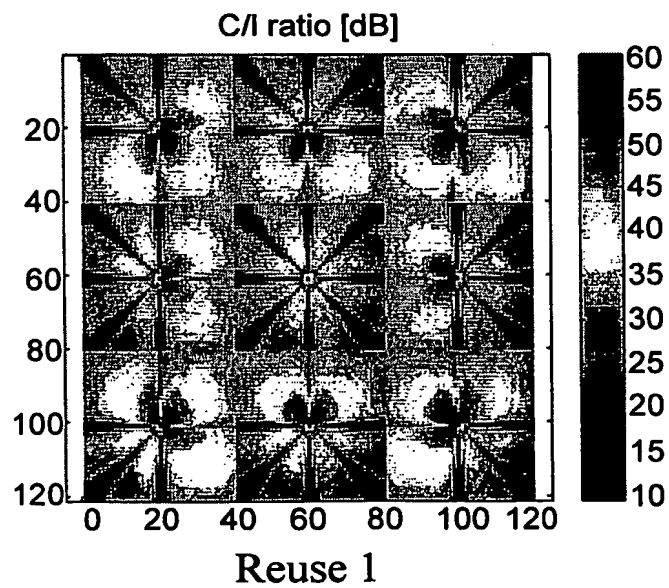


Figure 3

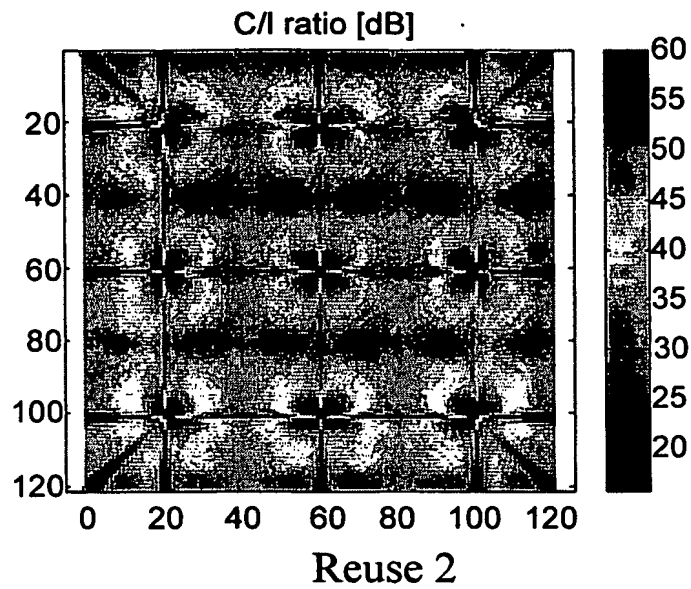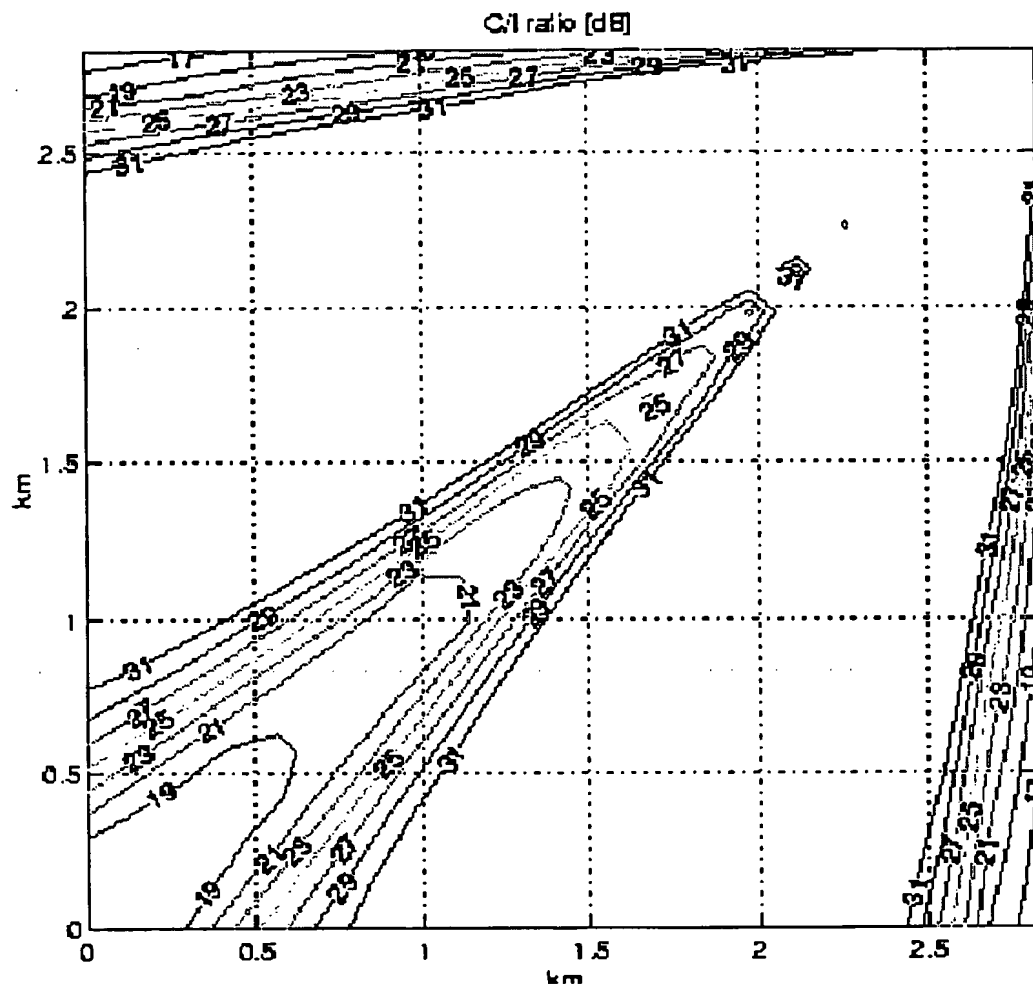

Reuse 2

Figure 4

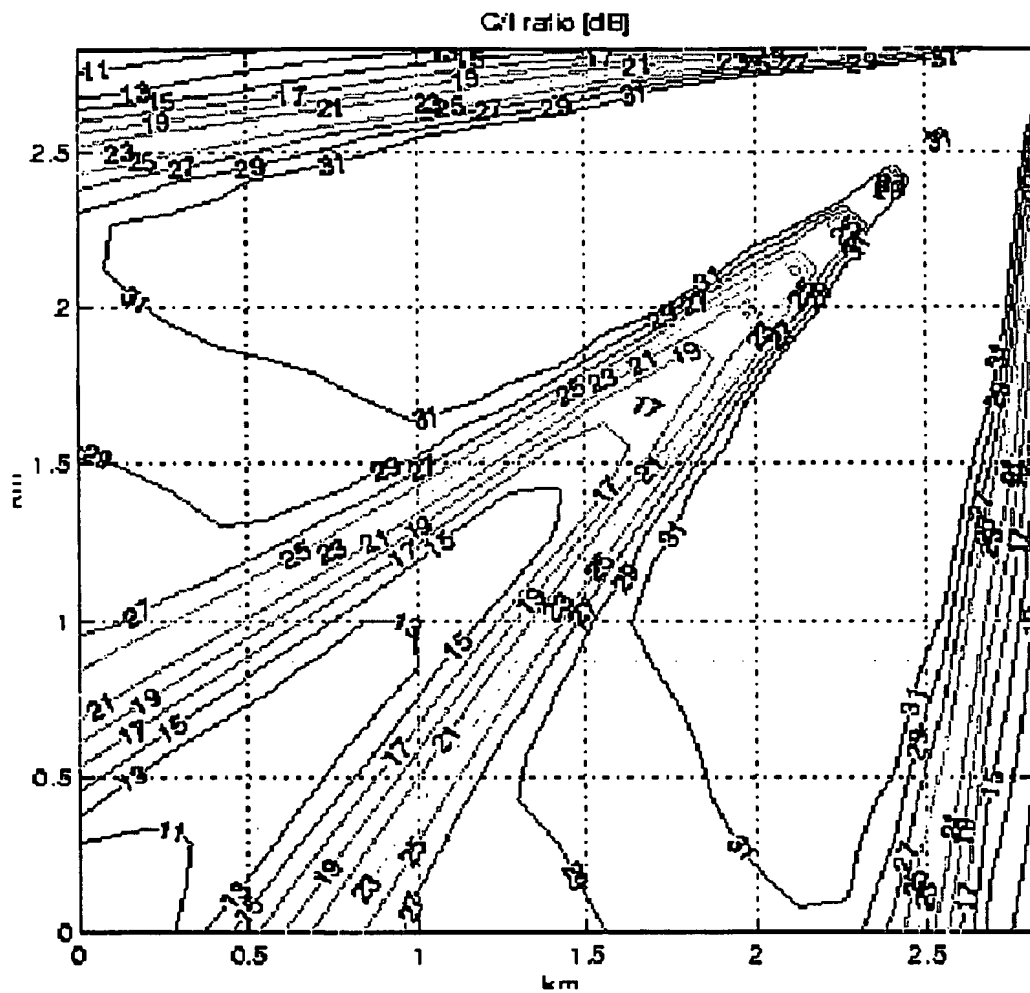

Reuse 1

Figure 4

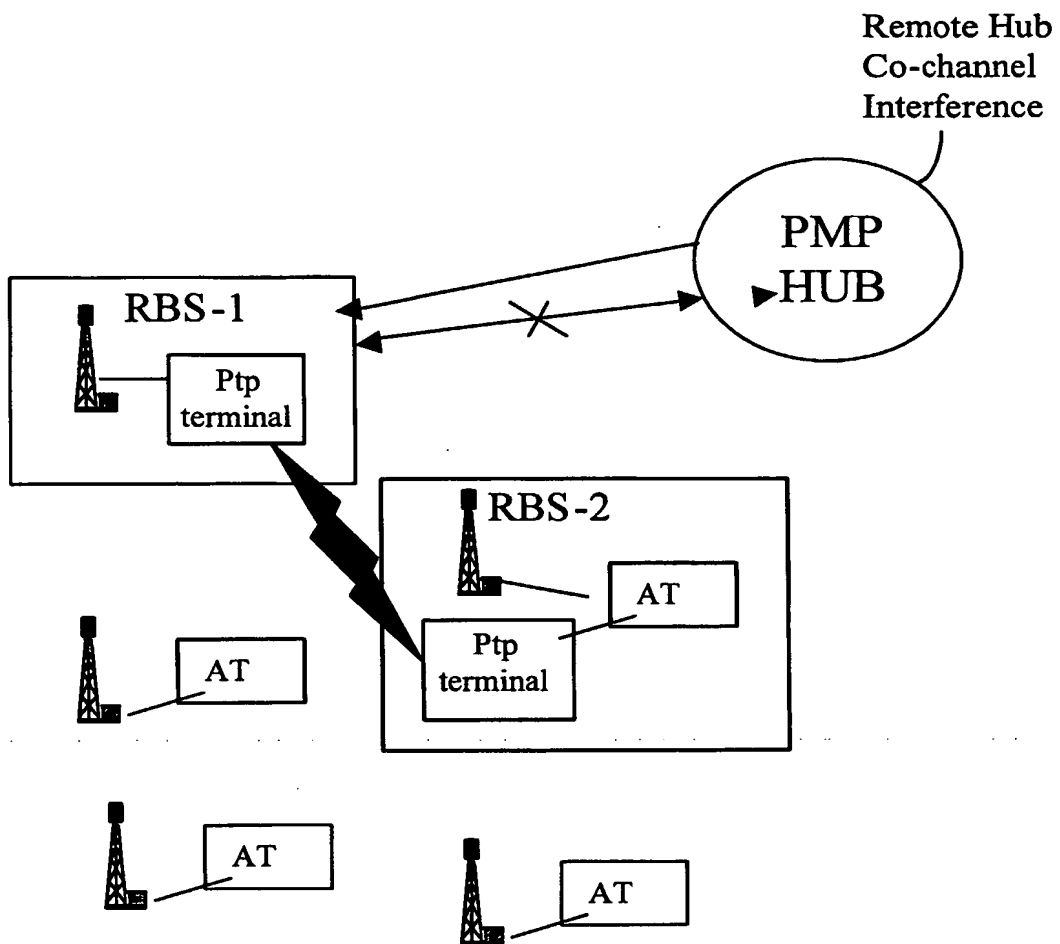


Figure 5

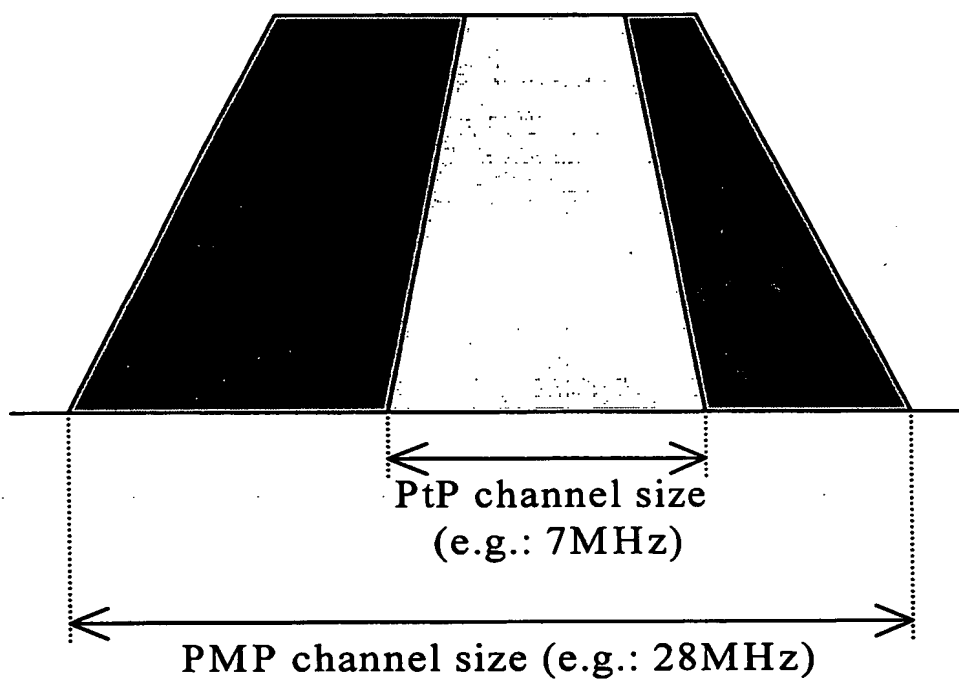


Figure 6

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/SE 03/01431

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/30, H04Q 7/36  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	US 200215405 A1 (GARRISON, G,J, ET AL), 31 October 2002 (31.10.02), paragraphs[0008] - [0014] --	1-13
A	US 5884181 A (ARNOLD, H.W. ET AL), 16 March 1999 (16.03.99), column 1, line 15 - line 52; column 4, line 23 - column 5, line 39 --	1-13
A	US 6421542 B1 (SANDLER, H.M. ET AL), 16 July 2002 (16.07.02), column 2, line 15 - line 47 --	1-13
A	US 6304762 B1 (MYERS, W.K. ET AL), 16 October 2001 (16.10.01), column 1, line 60 - column 2, line 57 --	1-13

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

- |   |   |
|---|---|
| <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p> |
|---|---|

Date of the actual completion of the international search

Date of mailing of the international search report

9 December 2003

12 -12- 2003

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson /OGU  
Telephone No. +46 8 782 25 00



# INTERNATIONAL SEARCH REPORT

Information on patent family members

06/09/03

International application No.

PCT/SE 03/01431

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	200215405	A1	31/10/02	NONE	
US	5884181	A	16/03/99	AU 716355 B	24/02/00
				AU 5918296 A	11/08/97
				CA 2243338 A,C	24/07/97
				CN 1219307 A	09/06/99
				EP 0875101 A	04/11/98
				JP 2000508130 T	27/06/00
				WO 9726717 A	24/07/97
US	6421542	B1	16/07/02	US 5988946 A	23/11/99
US	6304762	B1	16/10/01	EP 0851698 A	01/07/98
				JP 10234075 A	02/09/98

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**